



## GRATING


We supply grating in mild steel, stainless steel and 3CR12 in stock panels 2400 x 1200 or according to the customer's specification in the following pitch size from 40/40, to 43/100 in un-coated, bitumen dipped and galvanized. Stair threads standard sizes: 600 x 205 to 1000 x 285 Non-slip preformed nosing is supplied as standard on all stair threads. Trench covers standard sizes: 325 x 1000 to 500 x 1000. Supplied separately or with frame. Fiberglass grating is supplied in vinyl ester and isophthalic polyester panels with pitch from 38 x 38 x25 to 50 x 50 x 50

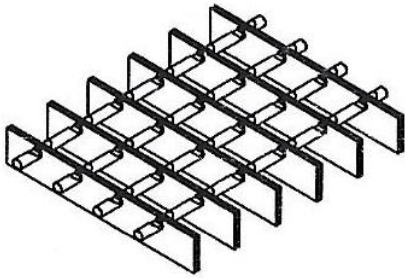

PLAIN TOP

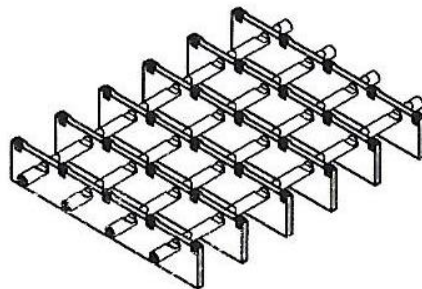

NON-SLIP

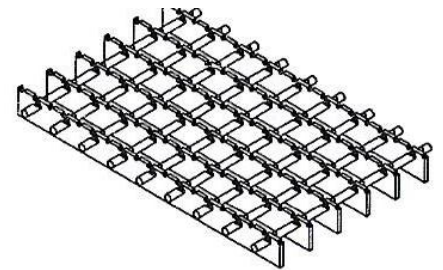

SERRATED

**CONTACT US DIRECTLY FOR STOCK**




# Aiden


Mining & Engineering Distributors

## HAND RAILING


Hand railing is supplied in mild steel & stainless steel in standard lengths with 2 ball stanchions or custom-made to the customer's specifications.

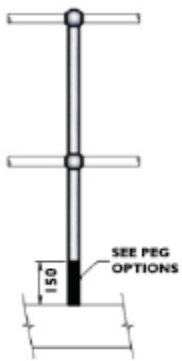


**90° PM  
PEG MOUNT**

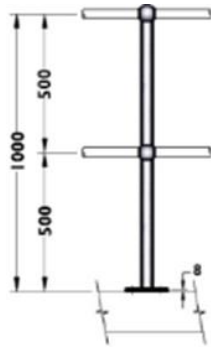


**90° TM  
TOP MOUNT**

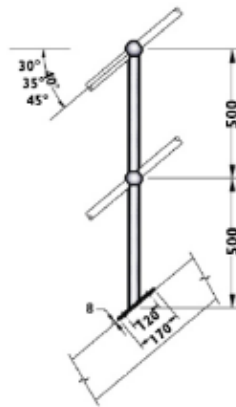


**40° TMA  
TOP MOUNT ANGLE BASE**

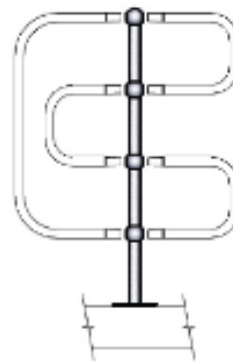


**4-BALL STANCHION  
C/W 750 CLOSURE &  
250 CLOSURE**

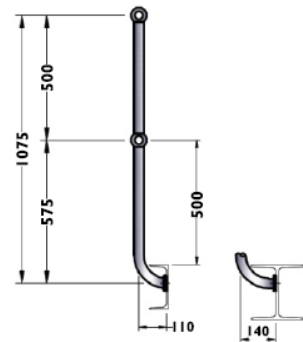


**90° GN  
GOOSE NECK  
STD 110MM OFFSET  
PLEASE SPECIFY 140mm OFFSET**

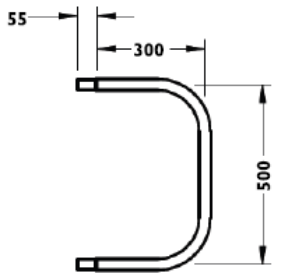


**90° CLOSURE SW**

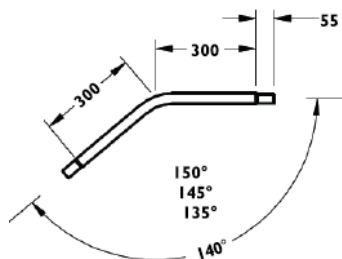

**140° RAMP BEND SW**



**90° S/R BEND SW  
SHORT RADIUS**

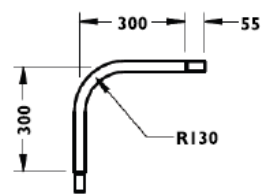

**90° L/R BEND SW  
LONG RADIUS**

**CONTACT US DIRECTLY FOR STOCK**